


Cone Type Flowmeter

Model : SCF

SCF

Cone Type Flowmeter

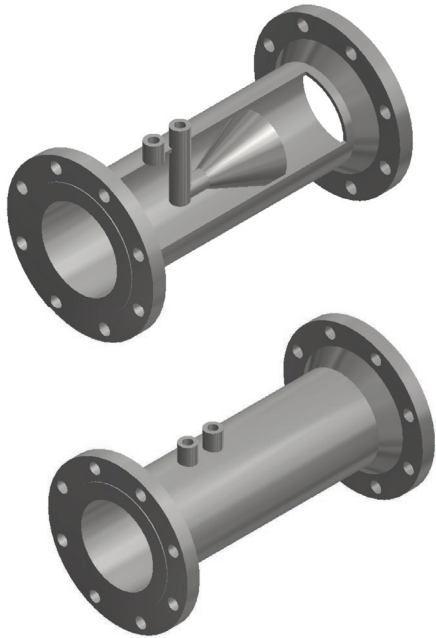

Introduction

The Cone is a differential head flowmeter consisting of a circular cone placed in the center of a pipe section with two pressure taps. The upstream pressure tap is placed at a point where flow is undisturbed by the cone, and the downstream tap at the end of the cone facing downstream. The liquid or gas flows through the annular gap formed between the pipe wall and the cone, inducing a differential head that is proportional to the flow rate.

The Cone Type Flowmeter is supplied as a spool piece to be installed between two flanges. The principal advantage of this flowmeter is in that it does not require a long straight section of pipe upstream of the meter.

In most cases pieces of pipe 3x diameters long placed upstream and downstream of the spool piece assure accurate and repeatable measurement of flow rates.

This important feature, unique to the Cone Type Flowmeter, results from the fact that the cone reshapes the incoming flow field at the annulus and unlike the orifice flowmeter, an accurate flow rate measurement does not depend on the fully developed turbulent flow profile. This feature can significantly contribute to the efficient utilization of plant space for piping layout.

Specification

STANDARD ACCURACY

±0.5% of actual flowrate

REPEATABILITY

0.1% or better

STANDARD BETA RATIOS

0.4, 0.5, 0.6, 0.75: special Betas are available from 0.3 to 0.92

HEAD LOSS

Approximately 20% of the generated differential pressure

INSTALLATION PIPING REQUIREMENTS

1 to 2 diameters upstream: 3 to 5 diameters downstream

FLANGE RATING

JIS 10K, 20K, 30K etc.
ANSI(or JPI) 150, 300, 600 etc.

MATERIALS OF CONSTRUCTION INCLUDED

Standard: 304SS, 316SS, Carbon
Special materials on request

LINE SIZES AVAILABLE

0.5" to 40" and large

END FITTINGS

Flanged, threaded, or weld-end standard
Others on request

DISCHARGE COEFFICIENTS

0.70 to 0.85 typical

PRESSURE

600 psig max

TEMPERATURE

370°C

Features

High repeatability and accuracy
Wide range for measuring fluids
High Reliability due to no movement's part
Short straight distance on both upstream and down stream
Wide application for liquid, vapor and steam

Principle

SCF's operating principle is the same as other pressure differential flow meters. Cone device is inserted into a center of pipe which will reduce the flow area. The intentional reduction in flow area will cause a local increase in velocity and a measurable local pressure drop across the flow path. So the pressure drop is in part due to the so-called Bernoulli effect between A and B.

Differential Pressure (ρ) and Flow Rate (Q_v)

$$Q_v \propto k \sqrt{\Delta p}$$

Effectual Area Ratio (m),

$$M = \frac{\sqrt{D^2 - d^2}}{D^2}, \quad \beta = \sqrt{\frac{D^2 - d^2}{D^2}}$$

Therefore, Flow Rate

$$Q_v = cd \cdot A_2 \cdot E \cdot \varepsilon \cdot \sqrt{\frac{2\Delta p}{\rho}}$$

D : Diameter of Pipe

β : Bore to Diameter Ratio

A_1 : Cross Area of Pipe

A_2 : Reduced Cross Area

E : Approaching Velocity Coefficient

ρ : Density of Flowing Fluid




d : Diameter of Cone

cd : Discharge Coefficient


m : Effectual Area Ratio

ε : Expansion Coefficient


Δp : Differential Pressure



Model Type

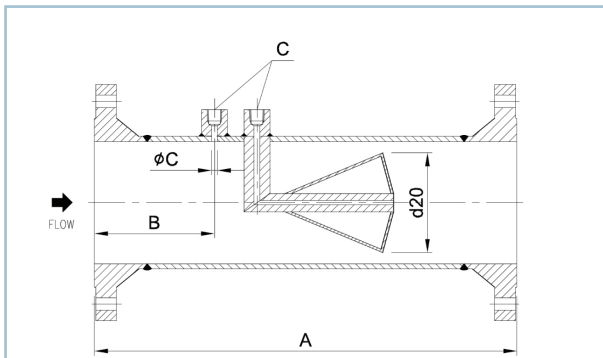

Type : SCF-A

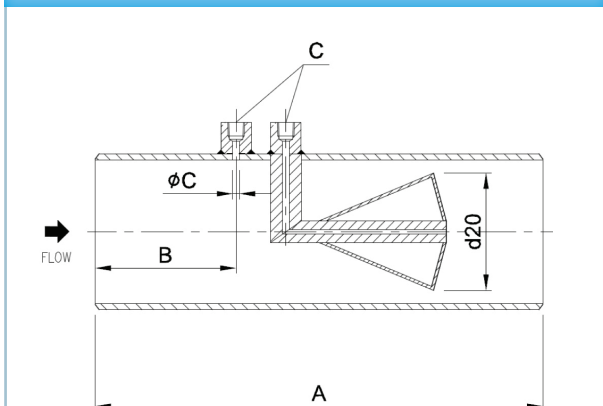

Type : SCF-B

Size(mm)	A(mm)	B(mm)	C(pt)	C(ϕ)	Remarks
15	203	64	1/4	6	150#, 300# ANSI, RF FLANGE
20	203	64	1/4	6	
25	203	64	1/4	6	
40	254	76	1/4	6	
50	305	89	1/2	6	
65	305	89	1/2	6	
80	356	89	1/2	6	
100	406	102	1/2	8	
150	559	108	1/2	8	
200	660	127	1/2	8	
250	711	127	1/2	8	
300	762	133	1/2	8	
350	762	152	1/2	8	
400	762	152	1/2	8	
500	914	152	1/2	8	
600	1219	254	1/2	8	
1800	4000	254	1/2	12	

Ordering Information

■ CONE TYPE FLOWMETER

SCF - A 1 A 1 A 1 A

OPTION

A = Other
B = None

BOSS MATERIAL

1 = Carbon Steel
2 = 304 SS
3 = etc.

BODY MATERIAL

A = Carbon Steel
B = 304 SS
C = 316 SS
D = etc.

FLANGE MATERIAL

1 = Carbon Steel
2 = 304 SS
3 = 316 SS
4 = etc.

FLANGE RATING

A = JIS 10K
B = JIS 20K
C = JIS 30K
D = ANSI #150
E = ANSI #300
F = ANSI #600
G = ANSI #900
H = etc.

LINE SIZE

1 = 15A (1/2")
2 = 20A (3/4")
3 = 25A (1")
4 = 32A (1-1/2")
5 = 50A (2")
6 = 65A (2-1/2")
7 = 80A (3")
8 = 100A (4")
9 = 125A (5")
10 = 150A (6")
11 = 200A (8")
12 = etc.

TYPE

A = Flanged End
B = Butt Weld End

■ When placing an order, selected ordering number should be indicated on the purchase order sheet.



14, Dunchon-daero 457beon-gil, Jungwon-gu
Seongnam-si, Gyeonggi-do, Korea[Zip.13218]

☎ +82-31-627-9000 📠 +82-31-624-5345

<http://www.seojin.biz>

2019 Edition Rev.0 (printed by Daumi)

■ Specifications subject to change without notice